


INOVA

Sliding System


Properties		
	Profile Width (mm)	147
	Glass Thickness (mm)	24 - 50
	Thermal Insulation (Uw) W/m ² K	1,40
	Air Permeability	Class 4
	Wind Load Resistance	Class B3
	Maximum Sash Weight (kg)	400
	Water Tightness	Class 9A




MAIN PROFILES

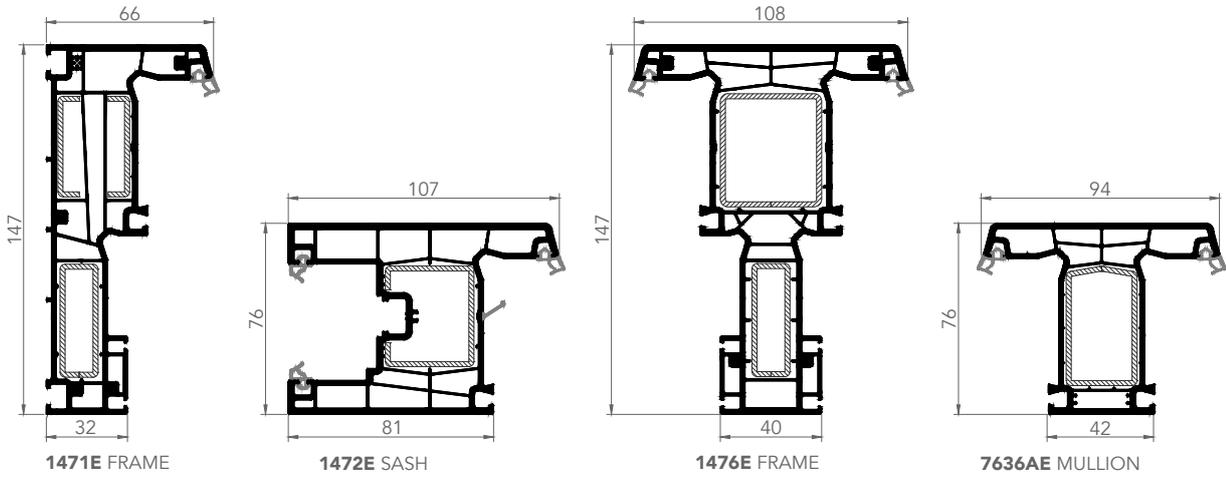


AUXILIARY PVC PROFILES

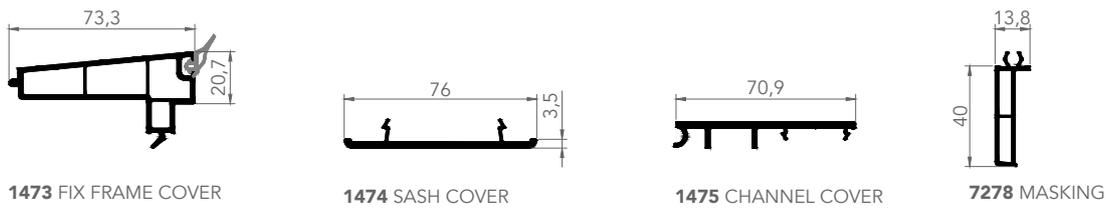


GLAZING BEADS

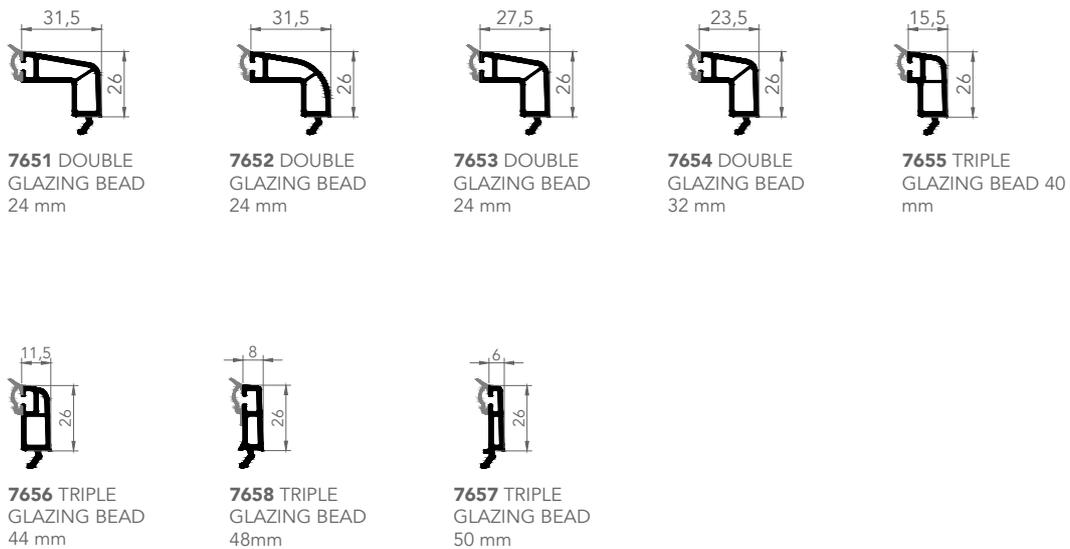


AUXILIARY ALUMINIUM PROFILES



A016689
FRAME TOP GUIDE



A016690
FRAME UNDER
GUIDE-RAIL




A016691
FRAME ESPAGNOLETTE
GUIDE




A016692
SASH
ESPAGNOLETTE
EXTENSION




A017031
FRAME BOTTOM
WET AREA COVER




A017270
SASH VERTICAL
ALUMINIUM COVER




A017581
MULLION
EXTENSION



A018686
C-SCHEME PASSIVE
SASH FILLING




A018687
C-SCHEME PASSIVE
IN-OUT COVER




A019812
ESPAGNOLETTE
CENTER
EXTENSION


AUXILIARY PROFILES

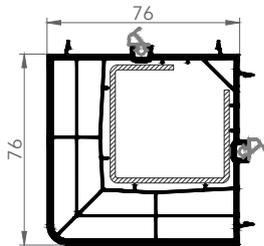


7662 90° CORNER ADAPTER

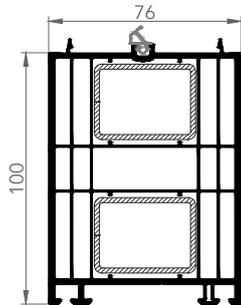


7663 76/100 EXTENSION




7667 76/60 EXTENSION




7665 76/40 EXTENSION




7666 FRAME EXTENSION




7664 76/20 EXTENSION




7661 CORNER ADAPTER




7254 CORNER PIPE

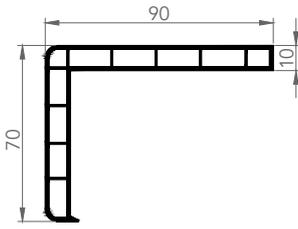

6019 MASKING PROFILE

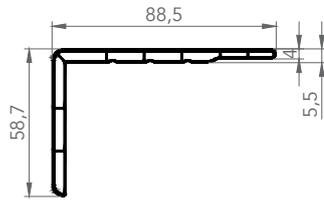


7288 MASKING PROFILE

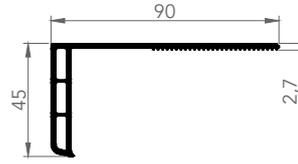


6055 MASKING PROFILE




7258 CONNECTION




7276 NARROW CONNECTION



7277 DROPPER



7279 FOR SILL

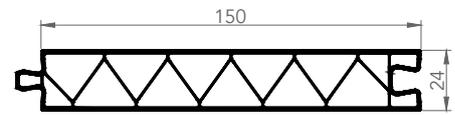

7251 PANEL PROFILE 150X24 mm

SECTIONAL DETAILS

